

TS500-1800

<Sublimation transfer model> High-speed inkjet printer

Mimaki



Massive Productivity Reliable stability

Capabilities supported by assured technology add value to your business



Sublimation
Transfer
Model

MASSIVE PRODUCTIVITY

Massive Productivity Reliable Stability

TS500-1800

<Sublimation transfer model> High-speed inkjet printer



Not only is the TS500-1800 *the worlds fastest sublimation printer, it also has many features that ensure reliably stable print operation. Please try unparalleled productivity supported by uninterrupted operation.

* As of July 2013, according to a survey result by Mimaki Engineering Co.,Ltd.


Achieves the world's fastest* 150 m²/h

Six newly developed print heads

Six units of newly developed print heads are mounted.



The print heads are arranged in 3 staggered rows. Such a configuration enables a large print swath, compared with conventional models, and achieves a print speed of up to 150 m²/h.

Moreover, a variable dot function delivers fine, high resolution prints that are less granular by jetting two different ink drop sizes at a time.



3 staggered rows

*As of July 2013, according to a survey result by Mimaki Engineering Co.,Ltd.
Surveyed print speeds are limited to sublimation transfer models.
(300x300 to HQ,2P,Bi/Nr)

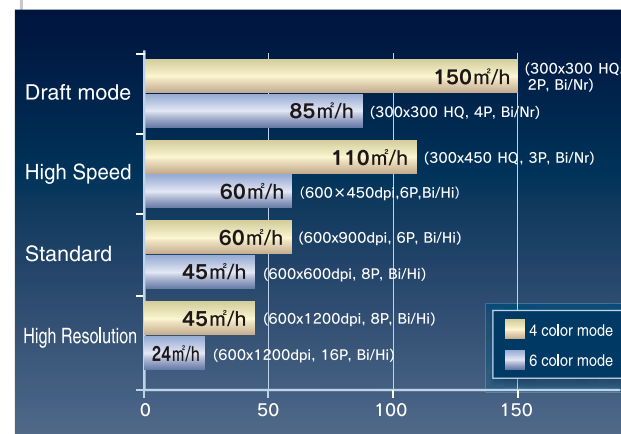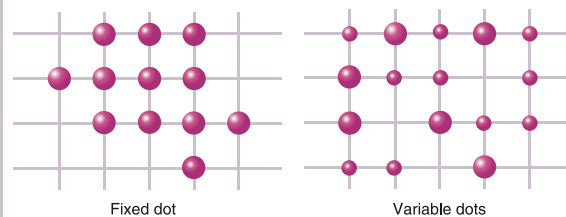


Ensure feeding /take-up of heavy media

AMF mechanism

Mimaki's unique media feeding/take-up mechanism, AMF, delivers stable continuous printing of long and heavy rolled media and less banding by maintaining an appropriate tension depending on media. Maximum loadable media size is up to 60kg and 300mm in diameter.


*AMF=Auto Media Feeder

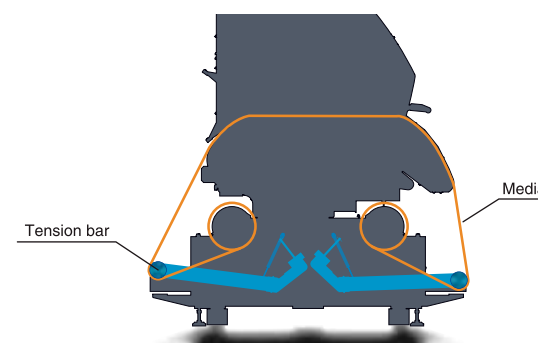

Prevent the interruption of print caused by ink end

UISS (Uninterrupted Ink Supply System)

Mimaki's UISS (Uninterrupted Ink Supply System) will automatically switch whenever one ink container is empty to the other ink container of the same color. In addition, operators can exchange the ink containers even when the printer is at work. Therefore UISS enables long continuous print runs.

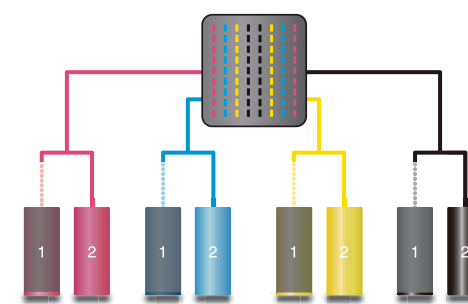


When bottle 1 is empty, the other bottle starts to supply ink.

Drying mechanism for varied media

Optimized heater control

A print heater and two post heaters are provided. Built-in heaters accelerate the ink drying time by heating the media during and after printing. There are two post-heaters. The heater near the platen has a temperature controller in order to meet optimized temperatures of each media. The temperature can be increased to shorten ink drying time or decreased for heat-sensitive media.

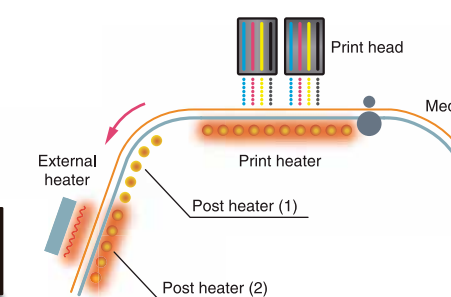


* Depending on the environment, an external heater may be required.

Support smooth operation

Ink mist reduction function


Embedded intake/exhaust fans create airflow which forces ink mists through filters. The reduction of these troublesome ink mists allows for stable operation of the machine.

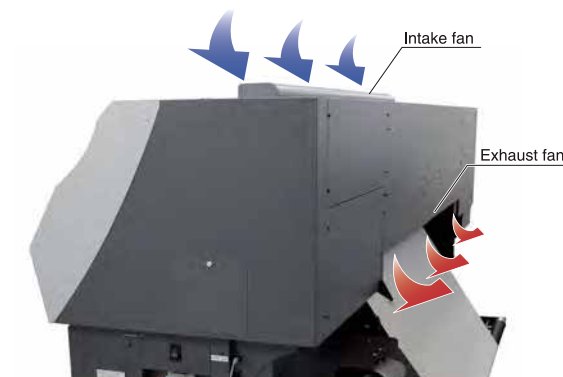

Maintain print operation

Nozzle Recovery Function

Even if nozzle washing has no effect on a troubled nozzle, the print image quality can be restored immediately. During this nozzle downtime, the nozzle recovery function enables the printer to produce high quality prints continuously, without slowing down.

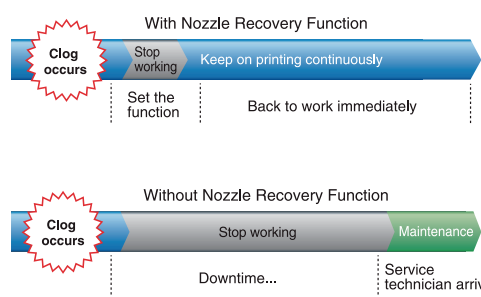

* Nozzle Recovery Function is a temporary "failure averting function" to continue operation, and its recoverability is limited.


TS500-1800

Low cost

Offers low-priced ink and ensures stable printing

Ink degassing module

A degassing process is required for manufacturing conventional pouched ink. An embedded degassing module "MDM-20" enables TS500-1800 to use undegassed bottled inks. Low-priced inks are provided by eliminating the degassing process. Before the ink reaches the print head, gasses or bubbles inside the ink are eliminated, therefore stable ink jetting is assured.



* Degassing module needs to be replaced regularly.

High resolution

Newly developed sublimation ink Sb300

New sublimation ink, Sb300, dries fast and reproduces deep and vibrant colors. Combined use of TS500-1800 and Sb300 delivers more impressive print results.



Software

■ Bundled RIP software

User friendly RIP "RasterLink 6" comes standard

RasterLink 6

- ◆ More beautiful and advanced print results are achieved by following a user-friendly interface that is easy to operate.
- ◆ Color replacement function enhances the ability to re-create printed images.
- ◆ Print color can be simulated on Illustrator / Photoshop without an actual print

* This function requires MPM2 (Mimaki Profile Master 2).

<Supports Web update function>

- ◆ Program update and profile download can be easily performed via internet.

■ Optional

Professional software RIP for multi color separation (optional)

Software RIP for Multi Color Separation

TxLiNK Pro

- ◆ Spot color can be assigned to each color on separation plates.
- ◆ ICC profile creation from CMYK + spot colors.
- ◆ Color replacement on raster data
- ◆ A variety of paneling functions, including step-and-repeat layout, which are useful for textile designing.

■ Specifications

Item	TS500-1800
Head	On-demand Piezo head (6 printheads with 3 staggered configuration)
Maximum width	1,890 mm (74.4")
Print resolution	300,450,600,900,1200dpi
Print mode	4 color (Uni- / Bi-directional) 300x300dpi, 300x300HQ, 300x450HQ, 600x600dpi, 600x900dpi, 600x1200dpi
	6 color (Uni- / Bi-directional) 300x300dpi, 300x300HQ, 300x450dpi, 600x600dpi, 600x900dpi, 600x1200dpi
Ink	Sublimation Ink Sb300 4 color (B, M, Y, Bk)
	6 color (B, M, Y, Bk, Lb, Lm)
Ink supply system	2L bottle / each color
Media	Type Sublimation transfer paper
	Width Maximum: 1,910 mm (75.2"), Minimum: 297 mm (11.7")
	Thickness Up to 0.2 mm
	Weight Up to 60 kg (132lbs)
	Print aspect Outside
	Roll diameter External: φ300mm (11.8"), Inside: φ76mm (3.0")
	Cutter Y-direction cutter after head section
Drying device	3 way intelligent heater (Pre/Print/Post)
	External drying heater (Optional)
Media Take-up device	Roll take-up device, inside / outside selectable / 3 inch paper core
Print gap	1.5 mm~7.0 mm (Automatic adjustment)
Interface	USB2.0
Applicable standard	VCCI class A, FCC class A, UL60950-1, RoHS directive
	CE Marking (EMC, Low voltage and Machinery directive), CB Report
Power specification	Single-phase AC 200~240 V, 20 A or under
Power consumption	Less than 4,800W
Operational	Temperature 20°C-30°C (64-86 °F)
	Humidity 35-65 % RH (non condensing)
Dimensions (WxDxH)	3,810x1,400x1,700 mm (150.0"x55.1"x66.9") (*1)
Weight	750kg (1,653lbs)

*1 Ink supply unit is not included in the dimensions

■ Supplies

Item	Item No.	Remarks
Sublimation Ink Sb300	Blue SB300-BL-BB	2L ink bottle
	Magenta SB300-M-BB	
	Yellow SB300-Y-BB	
	Black SB300-KT-BB	
	Light Blue SB300-LBL-BB	
	Light Magenta SB300-LM-BB	
Flushing liquid 03	FL003-Z-BB	2L bottle
Maintenance kit	SPA-0188	SPA-0189, 0190, goggles and clean stick 10 pcs
Head filter replacement kit	SPA-0189	HF filter 20 pcs
Mist absorption and exhaust fan filter	SPA-0190	Fan filter 30 sheets
Wiper replacement kit	SPA-0193	Wiper rubber 2 pc
Cap rubber replacement kit	SPA-0194	Cap rubber 6 pcs
Air filter replacement kit	SPA-0195	Filter element 2 pcs
Ink filter replacement kit	SPA-0196	
Waste ink tank SL	SPA-0197	1 pc
Clean stick for head surrounding	SPC-0527	50 pcs
Washing bypass jig kit assy	OPT-J0320	1 set

●Some of the samples in this catalogue are artificial renderings. ●Specifications, design and dimensions stated in this catalogue may be subject to change without notice (for technical improvements, etc). ●The corporate names and merchandise names written on this catalogue are the trademark or registered trademark of the respective corporations. ●Inkjet printers print using extremely fine dots, so colors may very slightly vary after replacement of the printing heads. Also note that if using multiple printer units, colors could vary slightly from one unit to other unit due to slight individual differences.

Celupal

● ● ● ● DISTRIBUIDOR LÍDER EN PAPELES, PLOTTERS E INSUMOS

Celupal Internacional,
S. de R.L. de C.V.
Calle Tres 453, Parque Industrial Naulcoapán
C.P. 533370, Naulcoapán, Edo. de México
Tel. (55) 2625-2990/01 800 000 CELU (2358)
info@celupal.com

Sucursal Guadalajara
Matías Romero #1144, Col. San Carlos
C.P. 44480, Guadalajara, Jal.
Tel. (33) 3619 5046
guadalajara@celupal.com

Sucursal Monterrey
Patio A, González Garza #111 (Pleteros)
Col. Miras Sur, C.P. 64020, Monterrey, NL.
Tel/Fax: (81) 1936 6074
monterrey@celupal.com

Sucursal Querétaro
Prd. Corregidora Nte. #1220 Arboledas del
Parque Querétaro, Qro. C.P. 76140
Tel. (44) 2340 7722/23 (44) 2340 7080
queretaro@celupal.com

Sucursal Toluca
Calle Emiliano Zapata No. 79
Col. El Carmen Tototlán
Municipio de Toluca Estado de México
Tel. (722) 283 1039, (722) 283 1042
toluca@celupal.com

Sucursal Mérida
Calle 17 No. 316, Manzana 8 Ciudad
Industrial, Mérida, Yucatán
Tel. (999) 946 0908
merida@celupal.com

Sucursal Algarín
Bolívar #505 Local B, colonia Algarín,
Delegación Cuauhtémoc, D.F. C.P. 06680
Tel. (55)5530 4456 / 5519 2189
algarin@celupal.com



MIMAKI ENGINEERING CO., LTD.

2182-3 Shigeno-otsu, Tomi-city, Nagano 389-0512, Japan
Tel: +81-268-78-2288
trading@mimaki.jp www.mimaki.co.jp

MIMAKI USA, INC.

150 Satellite Boulevard, suite A, Suwanee, Georgia 30024, U.S.A.
Atlanta +1-888-530-3988 Boston +1-888-530-3986
Los Angeles +1-888-530-3987 Chicago +1-888-530-3985
www.mimakiusa.com

MIMAKI EUROPE B.V.

Stammerdijk 7E, 1112 AA Diemen, The Netherlands
Tel: +31-20-4627-640
info@mimakieurope.com
www.mimakieurope.com @MimakiEurope

Our factory is certified accord
to ISO14001:2004