



NEW UJF-7151 plus



Mimaki UJF-7151 plus

Multi-purpose, high performance, high precision UV-LED flatbed printer.

High precision dot placement

1. Table drive minimizes vibration.
2. Two ball screws on the sides of the table ensures precision feed.
3. Four-axis drive employs four motors to maintain consistent height accuracy and balance during table movement.

High productivity (Max 45 sqft/h*)


1. Incorporates six 2.11" wide print heads.
2. Larger LED-UV lamp cures ink perfectly at faster print speeds.
3. Print area of 28" x 20" accommodates larger substrates and more pieces per print.

*Maximum print speed subject to change.


Stable print quality (Unattended printing is possible)

1. **Ink Circulation Head** minimizes clogged nozzles by reducing ink settling and removing air bubbles.
2. **Nozzle Check Unit** performs automatic maintenance.
3. **MAPS4** reduces banding and uneven color.


HIGH PRECISION DROP LANDING

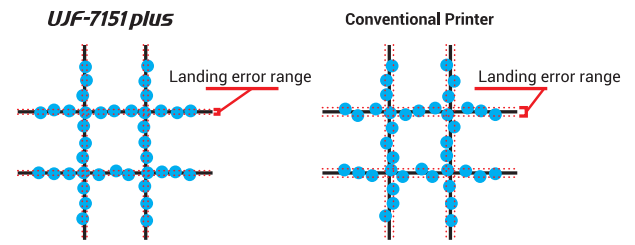

HEAD COMPARISON

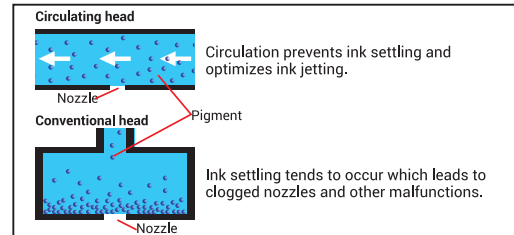

SELF-RECOVERY

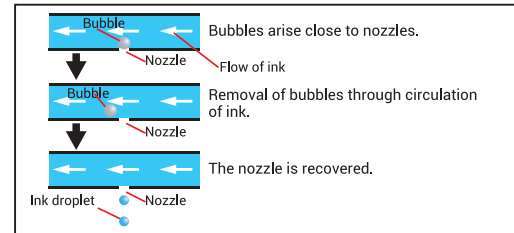

UJF-7151 plus SPECIFICATIONS | INKS

Item		Specifications
Print Head		On-demand piezo head (6 staggered print heads)
Maximum print resolution		1,200 dpi
Maximum printable area		28 x 20 in (710 x 510 mm)
Ink	Type/Color	LH-100 (C, M, Y, K, W, CI) PR - 200 (Primer) LUS-120 (C, M, Y, K, W) *
	Package size	1L bottle
Media	Size	28 x 20 in or smaller (710 x 510 mm)
	Height	6" or less (153 mm)
	Weight	22 lbs or less (10kg)
Certifications		VCCI class A, FCC class A, ETL UL 60950-1 CE Marking (EMC, Low voltage, Machinery directive, and RoHS), CB, REACH, Energy Star
Interface		USB 2.0 Hi-speed / Ethernet 1000BASE-T
Power Supply		Single-phase AC100-120V / AC200 - 240V
Power Consumption		1.3kW
Operational Environment		Temperature: 59° - 86° F (15 - 30 °C) Humidity: 35% - 65% Rh (non-condensing) Recommended temperature range for stable operation: 68 - 77° F (20 - 25° °C)
Dimensions (WxDxH)		86.5" x 61.8" x 50"
Weight		698.8 lbs (317 kg) Base stand weight included


Specifications, design and dimensions stated may be subject to change without notice (for technical improvements, etc.).

Ink Type	Ink set	Flexibility	Supply	Remark
LH-100	4C+WCI 4C + WPr	100%	1L Bottle	Primer is PR-200
LUS-120*	4C+WCI	170%	1L Bottle	Clear is LH-100

*LUS-120 will be supported in the future



UJF Series Lineup

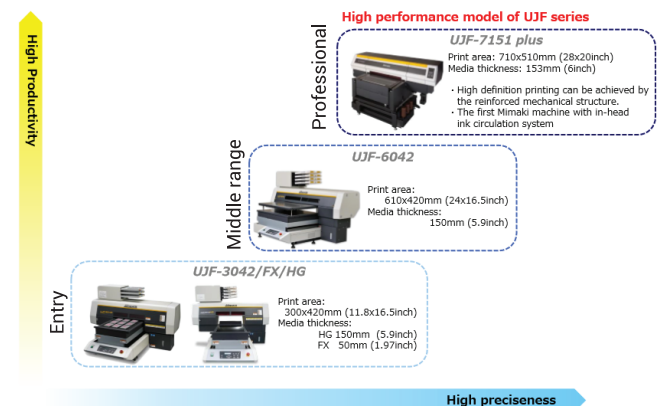

Celupal Internacional,
S. de R.L. de C.V.
Calle Ties #53, Parque Industrial Naucalpan
C.P. 53370, Naucalpan, Edo. de México
Tel. (55) 2625-2990/01 800 000 CELU (2358)
info@celupal.com

Sucursal Guadalajara
Matias Romero #1144, Col. San Carlos
C.P. 44460, Guadalajara, Jal.
Tel. (33) 3619 5046
guadalajara@celupal.com

Sucursal Toluca
Calle Emiliano Zapata No. 79
Col. "El Carmen" Tototepic
Municipio de Toluca Estado de México
Tel. (722) 283 1039, (722) 283 1042
toluca@celupal.com

Sucursal Merida
Calle 17 No. 316, Manzana 8 Ciudad
Industrial, Mérida, Yucatán
Tel. (999) 946 0908
merida@celupal.com

Celupal
DISTRIBUIDOR LÍDER EN PAPELES, PLOTTERS E INSUMOS

Mimaki | mimakiusa.com

Sucursal Querétaro
Prol. Corregidora Nte. #1220 Arboledas del
Parque Querétaro, Ciro, C.P. 76140
Tel. (44) 2340 7722/23, (44) 2340 7080
queretaro@celupal.com

Sucursal Algarín
Bolívar # 505 Local B, colonia Algarín,
Delegación Cuauhtémoc D.F. C.P.06880
Tel. (55)5330 4456 / 5519 2189
algarin@celupal.com

Sucursal Monterrey
Pablo A. González Garza #311 (Fleteros)
Col. Miras Sur, C.P. 64020, Monterrey, N.L.
Tel./Fax: (81) 1936 6074
monterrey@celupal.com

Sucursal Chihuahua
Av. Industrias No.8591-12
Col. Nombre de Dios
(Entre Zaragoza y Juan Escutia)
Chihuahua, Chih. C.P.31105
01800 000 CELU
chihuahua@celupal.com

Mimaki USA, Inc. | 150-A Satellite Blvd. Suwanee, GA 30024 | 888-530-4021 | info@mimakiusa.com

© 2015 Mimaki USA, Inc. All rights reserved. Ver. 1.0